

# SASSO 60 square downlight

trim

048-2612917S 048-2697318 002-90742



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



## Général

Plafond , Encastré  
blanc , RAL9016 <sup>1</sup>  
Set de montage Noir profond  
avant IP44 , arrière IP20  
564 lm

## LED

2700 K  
CRI ≥ 90  
MacAdam initial ≤ 2 SDCM  
R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 87  
MR 0.52  
MDER 0.47

## Optique

spot  
angle de faisceau 12°  
UGR < 19  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrique

non DIM  
système 10.4 W  
insert 8.8 W  
36 Vf  
250 mA  
CP2 220-240V  
système 54 lm/W<sup>3</sup>  
insert 64 lm/W<sup>4</sup>


## Physique

bord  
longueur 80 mm  
largeur 80 mm  
hauteur 48 mm  
0.23 kg


## Découpe

longueur 73 mm  
largeur 73 mm  
épaisseur min. du plafond 2 mm  
épaisseur max. du plafond 25 mm  
profondeur de l'encastrement 60 mm

## Répartition de la lumière



## Dessin de fabrication

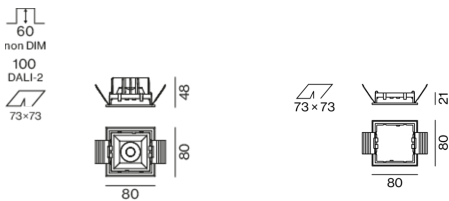

# SASSO 60 square downlight

trim

048-2612917S 048-2697318 002-90742



Projet / Type

Notes

Quantité / Date

Notice de  
montage



Calculateur  
d'éclairage

