

SASSO 60 round downlight

trimless

048-2602919M 048-2696117 002-90742



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré

rotation 360°

or , RAL260-M ¹

Set de montage blanc signalisation

avant IP44 , arrière IP20

787 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 97 , R_f: 91 , R₍₁₋₁₅₎: 87

MR 0.52

MDER 0.47

Optique

medium

angle de faisceau 21°

UGR < 16 , ≥65° <3000 cd/m²

P_{stLM} ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

10.2 W

insert 8.7 W

36 Vf

250 mA

CP2 220-240V

77 lm/W

insert 91 lm/W

Physique

sans bord

diamètre 73 mm

hauteur 48 mm

0.22 kg

Découpe


diamètre 73 mm

profondeur de l'encastrement 60 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

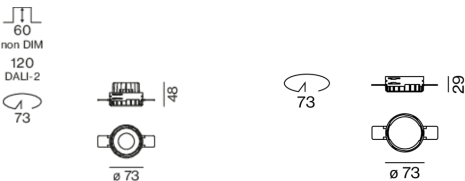

Notice de montage



Calculateur d'éclairage

