

# SASSO 60 round downlight

trimless exposed concrete

048-2602119M 048-2695210 002-90742



Projet / Type

Notes

Quantité / Date



↑ P20  
↓ P44

220-240V

360°

XPST

UGR  
≤16

cd/m²  
≤3000

CRI  
≥90

XPST

## Général

Plafond , Encastré

rotation 360°

or , RAL260-M <sup>1</sup>

Set de montage aluminium blanc

avant IP44 , arrière IP20

868 lm

## LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 88

MR 0.8

MDER 0.72

## Optique

medium

beam angle 21°

UGR < 16 , ≥65° <3000 cd/m²

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrique

non DIM

10.0 W

insert 8.5 W

36 Vf

250 mA

CP2 220-240V

87 lm/W

insert 102 lm/W

## Physique

trimless for exposed concrete ceiling

length 230 mm

width 230 mm

hauteur 162 mm

2.35 kg


## Découpe

recessed depth 60 mm


<sup>1</sup> Code RAL

<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

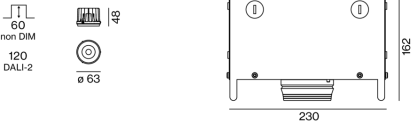

## Notice de montage



## Calculateur d'éclairage

