

SASSO 60 round downlight

trimless

048-2602014S 048-2696117 002-90742



Projet / Type

Notes

Quantité / Date



↑ P20
↓ P44

220-240V

360°

X-PEST

UGR
≤ 16

cd/m²
≤ 1500

CRI
≥ 90

X-PEST

Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage blanc signalisation

avant IP44 , arrière IP20

583 lm

LED

3000 K

CRI ≥ 90

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_r: 90 , R_{t(1-15)}: 87

MR 0.6

MDER 0.54

Optique

spot

beam angle 12°

UGR < 16 , ≥ 65° < 1500 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

non DIM

10.4 W

insert 8.8 W

36 Vf

250 mA

CP2 220-240V

56 lm/W

insert 66 lm/W

Physique

sans bord

diameter 73 mm

hauteur 48 mm

0.22 kg


Découpe

diameter 73 mm


recessed depth 60 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

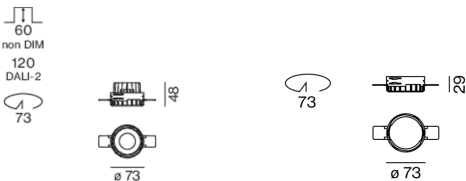

Notice de montage



Calculateur d'éclairage

