


FRAME 40 reflector

trim

042-7113037B



Projet / Type
Notes
Quantité / Date

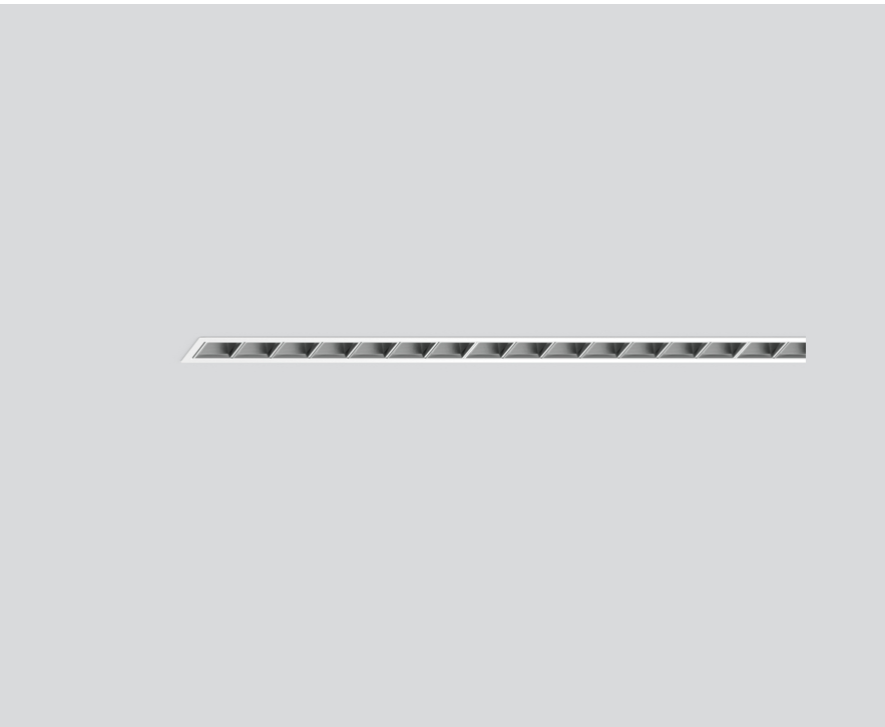

220-240V	X-PERT	UGR ≤ 16	cd/m ² ≤ 1500	CRI ≥ 90	X-PERT
----------	--------	---------------	-------------------------------	---------------	--------

Général

Plafond , Encastré
blanc signalisation , RAL9016 ¹
Réflecteur chrome foncé
2250 lm/m
IP20
3360 lm

LED

3000 K
CRI ≥ 90
L90 / 50000 h
MacAdam initial ≤ 3 SDCM
R _g : 99 , R _f : 91 , R ₍₁₋₁₅₎ : 89
MR 0.61
MDER 0.55

Optique

Reflector
Symmetric
UGR < 16 , $\geq 65^\circ$ < 1500 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrique

DALI-2
36 W
CP1 220-240V
93 lm/W
24 W/m

Physique


length 1519 mm
width 55 mm
hauteur 60 mm

Découpe


length 1509 mm
width 45 mm
min. ceiling thickness 8 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication



Notice de montage



Calculateur d'éclairage

