

SASSO 100 round downlight

trimless exposed concrete

048-2700017M 048-2795210 002-90780



Projet / Type _____

Notes _____

Quantité / Date _____



360° rotation icon

220-240V icon

IP20 / IP44 icon

X-PERT icon

X-PERT icon

Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 ¹

Set de montage aluminium blanc

avant IP44 , arrière IP20

2080 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_f: 90 , R_{t(1-15)}: 87

MR 0.6

MDER 0.54

Optique

medium

angle de faisceau 33°

UGR < 19

Electrique

non DIM

système 26.7 W

insert 22.7 W

36 Vf

650 mA

CP2 220-240V

système 78 lm/W²

insert 92 lm/W³

Physique

sans bordure pour plafond en béton apparent

longueur 230 mm

largeur 230 mm


hauteur 162 mm

2.58 kg


Découpe

profondeur de l'encastrement 80 mm

Répartition de la lumière



Dessin de fabrication

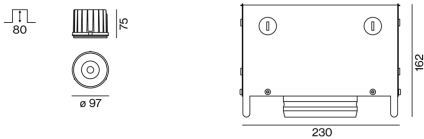

¹ Code RAL

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Notice de montage



Calculateur d'éclairage

