

SASSO 100 round wallwasher

trimless exposed concrete

048-2740919A 048-2795210 002-90789



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré _____

rotation 360° _____

or , RAL260-M ¹ _____

Set de montage aluminium blanc _____

IP20 _____

2140 lm _____

LED

2700 K _____

CRI ≥ 90 _____

L85 / 50000 h _____

MacAdam initial ≤ 3 SDCM _____

R_g: 101 , R_r: 90 , R_{t(1-5)}: 88 _____

MR 0.51 _____

MDER 0.46 _____

Optique

wallwasher _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrique

DALI-2 _____

système 27.8 W _____

insert 23.7 W _____

36 Vf _____

650 mA _____

CP2 220-240V _____

système 77 lm/W³ _____

insert 91 lm/W⁴ _____

Physique

sans bordure pour plafond en béton apparent _____

longueur 230 mm _____

largeur 230 mm _____


hauteur 162 mm _____

2.82 kg _____


Découpe

profondeur de l'encastrément 120 mm _____

Répartition de la lumière



Dessin de fabrication

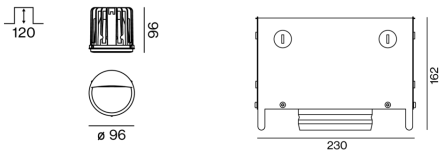

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Notice de montage



Calculateur d'éclairage

