

SASSO 100 round downlight

trimless exposed concrete

048-2700219S 048-2795210 002-90789



Projet / Type _____

Notes _____

Quantité / Date _____



360° rotation icon

220-240V icon

IP20 / IP44 icon

X-PERT icon

X-PERT icon

Général

Plafond , Encastré

rotation 360°

or , RAL260-M ¹

Set de montage aluminium blanc

avant IP44 , arrière IP20

2070 lm

LED

3500 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_f: 90 , R₍₁₋₁₅₎: 89

MR 0.7

MDER 0.64

Optique

spot

angle de faisceau 19°

UGR < 13

P_{stLM} ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

système 26.7 W

insert 22.7 W

36 Vf

650 mA

CP2 220-240V

système 78 lm/W³

insert 91 lm/W⁴

1 DALI Addr.

Physique

sans bordure pour plafond en béton apparent

longueur 230 mm

largeur 230 mm


hauteur 162 mm

2.62 kg


Découpe

profondeur de l'encastrement 80 mm

Répartition de la lumière



Dessin de fabrication

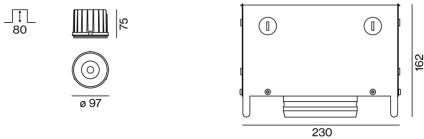

Notice de montage



Calculateur d'éclairage

