

SASSO 100 round downlight

trimless exposed concrete

048-2700111F 048-2795210 002-90767



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré _____

rotation 360° _____

noir , RAL9005 ¹ _____

Set de montage aluminium blanc _____

avant IP44 , arrière IP20 _____

1680 lm _____

LED

4000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

MacAdam initial ≤ 2 SDCM _____

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optique

flood _____

angle de faisceau 45° _____

UGR < 16 , ≥ 65° < 1500 cd/m² _____

P_{stLM} ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrique

DALI-2 _____

système 17.9 W _____

insert 15.2 W _____

36 Vf _____

450 mA _____

CP2 220-240V _____

système 94 lm/W³ _____

insert 110 lm/W⁴ _____

1 DALI Addr. _____

Physique

sans bordure pour plafond en béton apparent _____

longueur 230 mm _____

largeur 230 mm _____

hauteur 162 mm _____

2.63 kg _____

Découpe

profondeur de l'encastrément 80 mm _____


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)


³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Répartition de la lumière



Dessin de fabrication

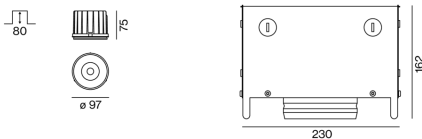

Notice de montage



Calculateur d'éclairage

