


MOVE IN 45 square

trim

063-8421517M 063-8842118 002-90724



Progetto / Tipo
Appunti
Quantità / Data

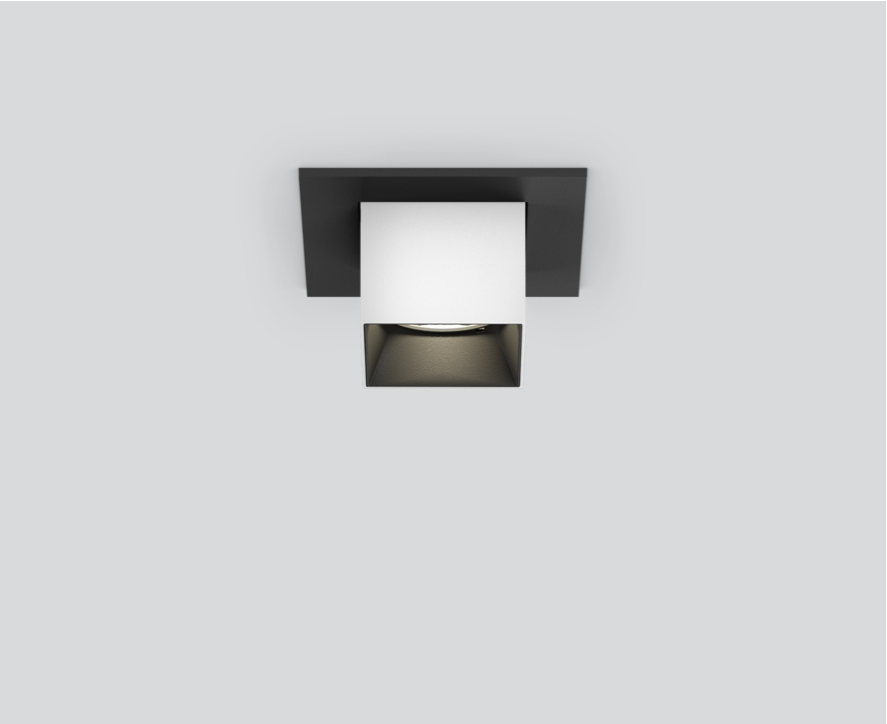

220-240V
X-PERT
UGR ≤ 10
CRI ≥ 90
X-PERT

Generale

Soffitto , Semi-incasso
bianco , RAL9016 ¹
Set di montaggio nero intenso
IP20
1270 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 100 , R _f : 91 , R _{f(1-15)} : 88
MR 0.59
MDER 0.53

Ottico

medium
beam angle 24°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

non DIM
15.9 W
inserto 13.5 W
36 Vf
400 mA
classe isolamento 2 220-240V
80 lm/W

Dati fisici


bordo
diameter 78 mm
altezza 105 mm
0.48 kg

Sagoma

diameter 70 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 180 mm

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)



Distribuzione della luce



medium 24°

h (m)	E0° (lx)	ø (m)
1	6120	0.43
2	1530	0.86
3	680	1.30
4	380	1.73
5	240	2.16

Disegno prodotto



Istruzioni di montaggio



Calcolatore di illuminazione

