

SASSO 100 square downlight

trim 2 lamps

048-2710614F 048-279931G 002-90774



Progetto / Tipo

Appunti

Quantità / Data



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 16

cd/m²
≤ 3000

CRI
≥ 90

X-PERT

Generale

Soffitto , Incasso

argento opaco

Set di montaggio alluminio bianco

fronte IP44 , retro IP20

4700 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam iniziale ≤ 2 SDCM

R_g: 97 , R_r: 90 , R_{t(1-15)}: 89

MR 0.81

MDER 0.74

Ottico

flood

beam angle 45°

UGR < 16 , ≥ 65° < 3000 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Dati elettrici

non DIM

58 W

inserto 24.8 W

36 Vf

700 mA

totale inserti 50 W

classe isolamento 2 220-240V

81 lm/W

inserto 95 lm/W

Dati fisici

bordo

length 218 mm

width 118 mm

altezza 75 mm

0.55 kg

Sagoma

length 210 mm

width 112 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

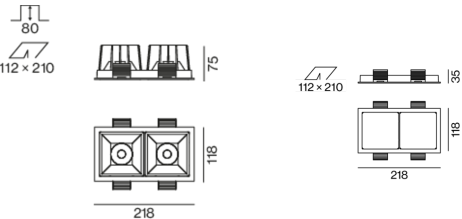

Istruzioni di montaggio



Calcolatore di illuminazione

