

SASSO 100 square downlight

trimless

048-2710611F 048-2797117 002-90777



Progetto / Tipo

Appunti

Quantità / Data



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 16

cd/m²
≤ 1500

CRI
≥ 90

X-PERT

Generale

Soffitto , Incasso

nero , RAL9005 ¹

Set di montaggio bianco traffico

fronte IP44 , retro IP20

1710 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam iniziale ≤ 2 SDCM

R_g: 97 , R_f: 90 , R_{t(1-15)}: 89

MR 0.81

MDER 0.74

Ottico

flood

beam angle 45°

UGR < 16 , ≥ 65° < 1500 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Dati elettrici

non DIM

20.2 W

inserto 17.2 W

36 Vf

500 mA

classe isolamento 2 220-240V

85 lm/W

inserto 99 lm/W

Dati fisici

senza bordo

length 105 mm

width 105 mm

altezza 75 mm

0.49 kg

Sagoma

length 106 mm


width 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

Distribuzione della luce



Disegno prodotto

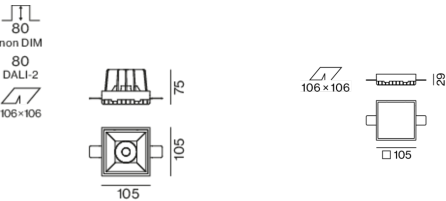

¹ Codice RAL

² Valore del prodotto contenitore a pieno carico (non regolato)

Istruzioni di montaggio



Calcolatore di illuminazione

