

SASSO 100 square downlight

trimless

048-2710611M 048-2797117 002-90774



Progetto / Tipo
Appunti
Quantità / Data



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤ 16	cd/m² ≤ 3000	CRI ≥ 90	X-PERT
------------------	----------	--------	-------------	-----------------	-------------	--------

Generale

Soffitto , Incasso
nero , RAL9005 ¹
Set di montaggio bianco traffico
fronte IP44 , retro IP20
1980 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 97 , R _f : 90 , R _{t(1-15)} : 89
MR 0.81
MDER 0.74

Ottico

medium
beam angle 33°x34°
UGR < 16 , ≥ 65° < 3000 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

non DIM
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
68 lm/W
inserto 80 lm/W

Dati fisici


senza bordo
length 105 mm
width 105 mm
altezza 75 mm
0.47 kg

Sagoma


length 106 mm
width 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

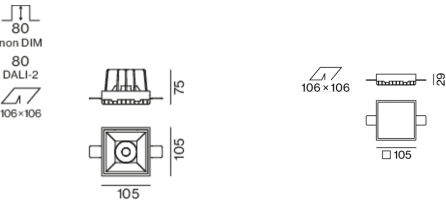

Istruzioni di montaggio



Calcolatore di illuminazione

