

# SASSO 100 square downlight

trim 2 lamps

048-2710514M 048-279931G 002-90774



Progetto / Tipo

Appunti

Quantità / Data



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤ 16

cd/m<sup>2</sup>  
≤ 3000

CRI  
≥ 90

X-PERT

## Generale

Soffitto , Incasso

argento opaco

Set di montaggio alluminio bianco

fronte IP44 , retro IP20

3980 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam iniziale ≤ 2 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 88

MR 0.59

MDER 0.53

## Ottico

medium

beam angle 33°x34°

UGR < 16 , ≥ 65° < 3000 cd/m<sup>2</sup>

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

## Dati elettrici

non DIM

58 W

inserto 24.8 W

36 Vf

700 mA

totale inserti 50 W

classe isolamento 2 220-240V

69 lm/W

inserto 80 lm/W

## Dati fisici

bordo

length 218 mm

width 118 mm

altezza 75 mm

0.55 kg

## Sagoma

length 210 mm

width 112 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> Valore del prodotto contenitore a pieno carico (non regolato)

## Distribuzione della luce



## Disegno prodotto

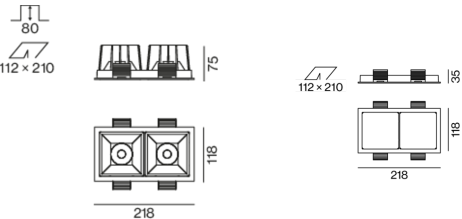

## Istruzioni di montaggio



## Calcolatore di illuminazione

