

SASSO 100 square downlight

trim 2 lamps

048-2710514F 048-2799318 002-90777



Progetto / Tipo

Appunti

Quantità / Data



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 16

cd/m²
≤ 1500

CRI
≥ 90

X-PERT

Generale

Soffitto , Incasso

argento opaco

Set di montaggio nero intenso

fronte IP44 , retro IP20

3380 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam iniziale ≤ 2 SDCM

R_g: 100 , R_f: 91 , R_{f(1-15)}: 88

MR 0.59

MDER 0.53

Ottico

flood

beam angle 45°

UGR < 16 , ≥ 65° < 1500 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Dati elettrici

non DIM

40 W

inserto 17.2 W

36 V_f

500 mA

totale inserti 34 W

classe isolamento 2 220-240V

85 lm/W

inserto 98 lm/W

Dati fisici

bordo

length 218 mm

width 118 mm

altezza 75 mm

0.57 kg

Sagoma

length 210 mm

width 112 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

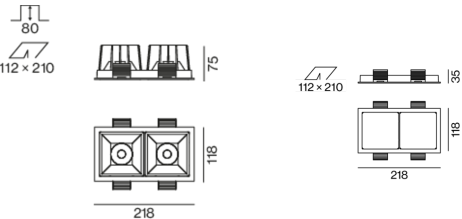

Istruzioni di montaggio



Calcolatore di illuminazione

