

# SASSO 100 round downlight

trimless

048-2700619F 048-2796117 002-90774



Progetto / Tipo
Appunti
Quantità / Data



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤ 16	cd/m <sup>2</sup> ≤ 3000	CRI ≥ 90	X-PERT
------------------	----------	--------	-------------	-----------------------------	-------------	--------

## Generale

Soffitto , Incasso
dorato , RAL260-M <sup>1</sup>
Set di montaggio bianco traffico
fronte IP44 , retro IP20
2270 lm

## LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R <sub>g</sub> : 97 , R <sub>r</sub> : 90 , R <sub>t(1-15)</sub> : 89
MR 0.81
MDER 0.74

## Ottico

flood
beam angle 44°
UGR < 16 , ≥ 65° < 3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

## Dati elettrici

non DIM
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
78 lm/W
inserto 91 lm/W

## Dati fisici

senza bordo
diameter 105 mm
altezza 75 mm
0.47 kg


## Sagoma

diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm


<sup>1</sup> Codice RAL

<sup>2</sup> Valore del prodotto contenitore a pieno carico (non regolato)

## Distribuzione della luce



## Disegno prodotto

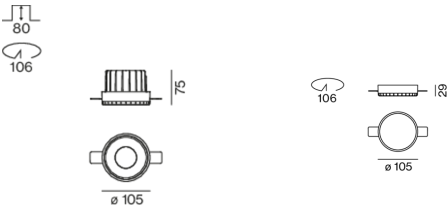

## Istruzioni di montaggio



## Calcolatore di illuminazione

