

SASSO 100 round downlight

trim

048-2700611W 048-2796318 002-90774



Progetto / Tipo _____

Appunti _____

Quantità / Data _____



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤22

cd/m²
≤1500

CRI
≥90

X-PERT

Generale

Soffitto , Incasso
nero , RAL9005 ¹
Set di montaggio nero intenso
fronte IP44 , retro IP20
2270 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R_g: 97 , R_r: 90 , R_{t(1-15)}: 89
MR 0.81
MDER 0.74

Ottico

wide flood
beam angle 65°
≥65° <1500 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

non DIM
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
78 lm/W
inserto 91 lm/W

Dati fisici


bordo
diameter 118 mm
altezza 75 mm
0.45 kg

Sagoma


diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

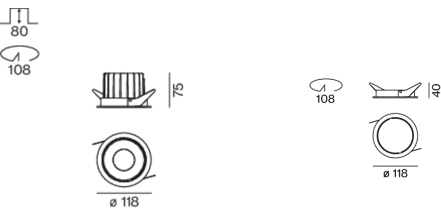

Istruzioni di montaggio



Calcolatore di illuminazione

