

SASSO 100 round downlight

trimless

048-2700611S 048-2796117 002-90774



Progetto / Tipo
Appunti
Quantità / Data



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤13	cd/m ² ≤3000	CRI ≥90	X-PERT
------------------	----------	--------	------------	----------------------------	------------	--------

Generale

Soffitto , Incasso
nero , RAL9005 ¹
Set di montaggio bianco traffico
fronte IP44 , retro IP20
1940 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 97 , R _r : 90 , R ₍₁₋₁₅₎ : 89
MR 0.81
MDER 0.74

Ottico

spot
beam angle 19°
UGR < 13 , ≥65° <3000 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

non DIM
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
66 lm/W
inserto 78 lm/W

Dati fisici


senza bordo
diameter 105 mm
altezza 75 mm
0.47 kg

Sagoma


diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

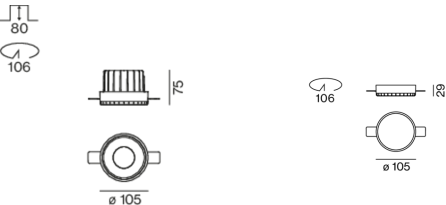

Istruzioni di montaggio



Calcolatore di illuminazione

