

SASSO 100 round downlight

trim

048-2700611M 048-2796318 002-90776



Progetto / Tipo
Appunti
Quantità / Data



↑ P20 ↓ P44	220-240V	X-PERT	UGR ≤ 16	cd/m² ≤ 3000	CRI ≥ 90	MACADAM	X-PERT
----------------	----------	--------	-------------	-----------------	-------------	---------	--------

Generale

Soffitto , Incasso
nero , RAL9005 ¹
Set di montaggio nero intenso
fronte IP44 , retro IP20
1930 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 97 , R _r : 90 , R _{t(1-15)} : 89
MR 0.81
MDER 0.74


Ottico

medium
beam angle 33°
UGR < 16 , ≥ 65° < 3000 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²


Dati elettrici

DALI-2
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
66 lm/W
inserto 78 lm/W
1 DALI Addr.

Distribuzione della luce



Disegno prodotto

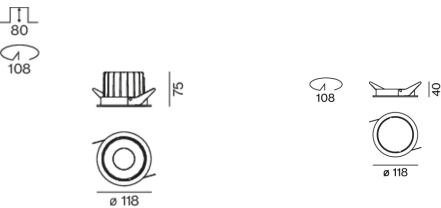

Dati fisici

bordo
diameter 118 mm
altezza 75 mm
0.49 kg

Sagoma

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Istruzioni di montaggio



Calcolatore di illuminazione

