

# SASSO 100 round downlight

trim

048-2700519S 048-2796318 002-90774



Progetto / Tipo

Appunti

Quantità / Data



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤13

cd/m<sup>2</sup>  
≤3000

CRI  
≥90

X-PERT

### Generale

Soffitto , Incasso

dorato , RAL260-M<sup>1</sup>

Set di montaggio nero intenso

fronte IP44 , retro IP20

1910 lm

### LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam iniziale ≤ 2 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 88

MR 0.59

MDER 0.53

### Ottico

spot

beam angle 19°

UGR < 13 , ≥65° <3000 cd/m<sup>2</sup>

PstLM ≤ 1.0<sup>2</sup>

SVM ≤ 0.4<sup>2</sup>

### Dati elettrici

non DIM

29.2 W

inserto 24.8 W

36 Vf

700 mA

classe isolamento 2 220-240V

65 lm/W

inserto 77 lm/W

### Dati fisici

bordo

diameter 118 mm

altezza 75 mm

0.45 kg

### Sagoma

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


<sup>1</sup> Codice RAL

<sup>2</sup> Valore del prodotto contenitore a pieno carico (non regolato)

### Distribuzione della luce



### Disegno prodotto

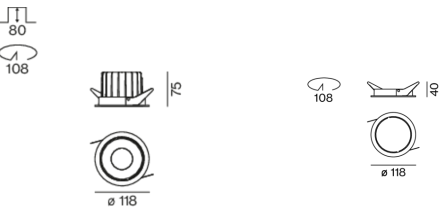

### Istruzioni di montaggio



### Calcolatore di illuminazione

