

SASSO 100 round downlight

trim

048-2700611F 048-279631G 002-90776



Progetto / Tipo
Appunti
Quantità / Data



↑ P20 ↓ P44	220-240V	X-PERT	UGR ≤ 16	cd/m ² ≤ 3000	CRI ≥ 90	MACADAM	X-PERT
----------------	----------	--------	-------------	-----------------------------	-------------	---------	--------

Generale

Soffitto , Incasso
nero , RAL9005 ¹
Set di montaggio alluminio bianco
fronte IP44 , retro IP20
2200 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 97 , R _f : 90 , R _{t(1-15)} : 89
MR 0.81
MDER 0.74

Ottico

flood
beam angle 45°
UGR < 16 , ≥ 65° < 3000 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

DALI-2
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
75 lm/W
inserto 89 lm/W
1 DALI Addr.

Dati fisici

bordo
diameter 118 mm
altezza 75 mm
0.49 kg


Sagoma

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm


¹ Codice RAL

² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

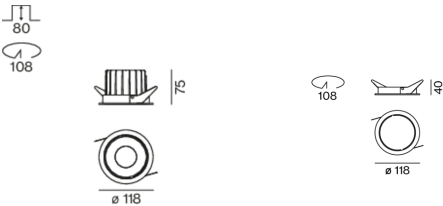

Istruzioni di montaggio



Calcolatore di illuminazione

