

SASSO 100 round downlight

trimless

048-2700519F 048-2796117 002-90779



Progetto / Tipo
Appunti
Quantità / Data



↑ P20 ↓ P44	220-240V	X-PERT	UGR ≤ 16	cd/m² ≤ 3000	CRI ≥ 90	MACADAM	X-PERT
----------------	----------	--------	-------------	-----------------	-------------	---------	--------

Generale

Soffitto , Incasso
dorato , RAL260-M ¹
Set di montaggio bianco traffico
fronte IP44 , retro IP20
1630 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 100 , R _f : 91 , R ₍₁₋₁₅₎ : 88
MR 0.59
MDER 0.53

Ottico

flood
beam angle 44°
UGR < 16 , ≥ 65° < 3000 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

DALI-2
20.2 W
inserto 17.2 W
36 V _f
500 mA
classe isolamento 2 220-240V
81 lm/W
inserto 95 lm/W
1 DALI Addr.

Dati fisici


senza bordo
diameter 105 mm
altezza 75 mm
0.53 kg

Sagoma


diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

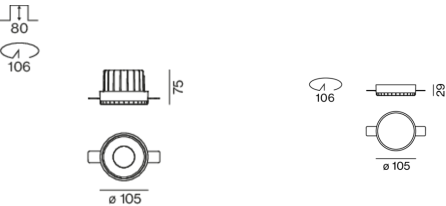

Istruzioni di montaggio



Calcolatore di illuminazione

