

SASSO 100 round downlight

trim

048-2700511M 048-2796318 002-90774



Progetto / Tipo

Appunti

Quantità / Data



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 16

cd/m²
≤ 3000

CRI
≥ 90

X-PERT

Generale

Soffitto , Incasso

nero , RAL9005 ¹

Set di montaggio nero intenso

fronte IP44 , retro IP20

1830 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam iniziale ≤ 2 SDCM

R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88

MR 0.59

MDER 0.53

Ottico

medium

beam angle 33°

UGR < 16 , ≥ 65° < 3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Dati elettrici

non DIM

29.2 W

inserto 24.8 W

36 Vf

700 mA

classe isolamento 2 220-240V

63 lm/W

inserto 74 lm/W

Dati fisici

bordo

diameter 118 mm

altezza 75 mm

0.45 kg

Sagoma

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


¹ Codice RAL

² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

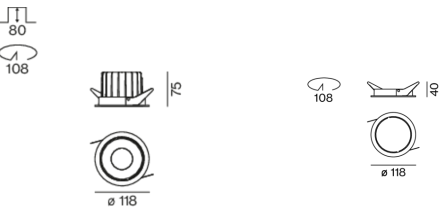

Istruzioni di montaggio



Calcolatore di illuminazione

