

SASSO 100 round downlight

trimless

048-2700511M 048-2796117 002-90774



| |
|-----------------|
| Progetto / Tipo |
| Appunti |
| Quantità / Data |



| | | | | | | |
|------------------|----------|--------|-------------|-----------------|-------------|--------|
| ↑ IP20 ↓ IP44 | 220-240V | X-PERT | UGR ≤ 16 | cd/m² ≤ 3000 | CRI ≥ 90 | X-PERT |
|------------------|----------|--------|-------------|-----------------|-------------|--------|

Generale

| |
|----------------------------------|
| Soffitto , Incasso |
| nero , RAL9005 ¹ |
| Set di montaggio bianco traffico |
| fronte IP44 , retro IP20 |
| 1830 lm |

LED

| |
|---|
| 3000 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| MacAdam iniziale ≤ 2 SDCM |
| R _g : 100 , R _f : 91 , R ₍₁₋₁₅₎ : 88 |
| MR 0.59 |
| MDER 0.53 |

Ottico

| |
|-------------------------------|
| medium |
| beam angle 33° |
| UGR < 16 , ≥ 65° < 3000 cd/m² |
| PstLM ≤ 1.0 ² |
| SVM ≤ 0.4 ² |

Dati elettrici

| |
|------------------------------|
| non DIM |
| 29.2 W |
| inserto 24.8 W |
| 36 Vf |
| 700 mA |
| classe isolamento 2 220-240V |
| 63 lm/W |
| inserto 74 lm/W |

Dati fisici


| |
|-----------------|
| senza bordo |
| diameter 105 mm |
| altezza 75 mm |
| 0.47 kg |

Sagoma


| |
|--------------------------------|
| diameter 106 mm |
| min. ceiling thickness 12.5 mm |
| max. ceiling thickness 25 mm |
| recessed depth 80 mm |

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

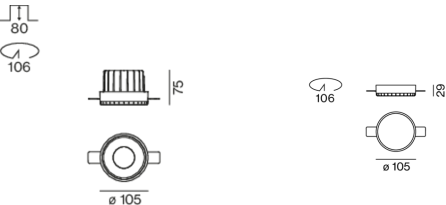

Istruzioni di montaggio



Calcolatore di illuminazione

