

SASSO 100 round downlight

trim

048-2700517F 048-2796318 002-90777



Progetto / Tipo

Appunti

Quantità / Data



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 19

CRI
≥ 90

X-PERT

Generale

Soffitto , Incasso

bianco , RAL9016 ¹

Set di montaggio nero intenso

fronte IP44 , retro IP20

1650 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam iniziale ≤ 2 SDCM

R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88

MR 0.59

MDER 0.53

Ottico

flood

beam angle 45°

UGR < 19

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Dati elettrici

non DIM

20.2 W

inserto 17.2 W

36 Vf

500 mA

classe isolamento 2 220-240V

82 lm/W

inserto 96 lm/W

Dati fisici

bordo

diameter 118 mm

altezza 75 mm

0.47 kg

Sagoma


diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

Distribuzione della luce



Disegno prodotto

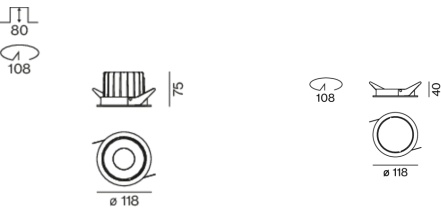

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Istruzioni di montaggio



Calcolatore di illuminazione

