

SASSO 100 round downlight

trim

048-2700511F 048-2796318 002-90777



Progetto / Tipo
Appunti
Quantità / Data



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤ 16	cd/m ² ≤ 1500	CRI ≥ 90	X-PERT
------------------	----------	--------	-------------	-----------------------------	-------------	--------

Generale

Soffitto , Incasso
nero , RAL9005 ¹
Set di montaggio nero intenso
fronte IP44 , retro IP20
1580 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 100 , R _f : 91 , R ₍₁₋₁₅₎ : 88
MR 0.59
MDER 0.53

Ottico

flood
beam angle 45°
UGR < 16 , ≥ 65° < 1500 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

non DIM
20.2 W
inserto 17.2 W
36 Vf
500 mA
classe isolamento 2 220-240V
78 lm/W
inserto 92 lm/W

Dati fisici


bordo
diameter 118 mm
altezza 75 mm
0.47 kg

Sagoma


diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Codice RAL
² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

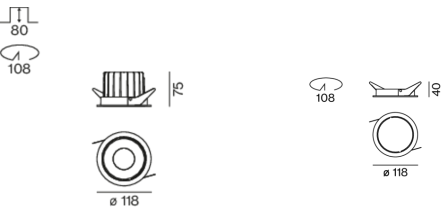

Istruzioni di montaggio



Calcolatore di illuminazione

