

SASSO 100 round downlight

trim

048-2700514F 048-2796318 002-90774



Progetto / Tipo
Appunti
Quantità / Data



IP20 IP44	220-240V	X-PERT	UGR ≤16	cd/m ² ≤3000	CRI ≥90	X-PERT
--------------	----------	--------	------------	----------------------------	------------	--------

Generale

Soffitto , Incasso
argento opaco
Set di montaggio nero intenso
fronte IP44 , retro IP20
2180 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 100 , R _f : 91 , R ₍₁₋₁₅₎ : 88
MR 0.59
MDER 0.53


Ottico

flood
beam angle 44°
UGR < 16 , ≥65° <3000 cd/m ²
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹


Dati elettrici

non DIM
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
75 lm/W
inserto 88 lm/W

Distribuzione della luce



Disegno prodotto

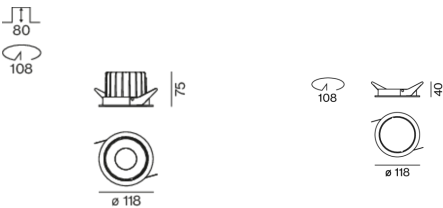

Dati fisici

bordo
diameter 118 mm
altezza 75 mm
0.45 kg

Sagoma

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Valore del prodotto contenitore a pieno carico (non regolato)

Istruzioni di montaggio



Calcolatore di illuminazione

