

SASSO 100 round downlight

trim

048-2700511W 048-279631G 002-90774



Progetto / Tipo
Appunti
Quantità / Data



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤22	cd/m ² ≤1500	CRI ≥90	X-PERT
------------------	----------	--------	------------	----------------------------	------------	--------

Generale

Soffitto , Incasso
nero , RAL9005 ¹
Set di montaggio alluminio bianco
fronte IP44 , retro IP20
2150 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 100 , R _f : 91 , R ₍₁₋₁₅₎ : 88
MR 0.59
MDER 0.53

Ottico

wide flood
beam angle 65°
≥65° <1500 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Dati elettrici

non DIM
29.2 W
inserto 24.8 W
36 Vf
700 mA
classe isolamento 2 220-240V
74 lm/W
inserto 86 lm/W

Dati fisici

bordo
diameter 118 mm
altezza 75 mm
0.45 kg


Sagoma

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm


¹ Codice RAL

² Valore del prodotto contenitore a pieno carico (non regolato)

Distribuzione della luce



Disegno prodotto

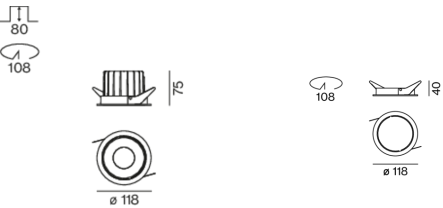

Istruzioni di montaggio



Calcolatore di illuminazione

