

# SASSO 100 round downlight

trim

048-2700411M 048-2796318 002-90777



Progetto / Tipo \_\_\_\_\_

Appunti \_\_\_\_\_

Quantità / Data \_\_\_\_\_



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤13

cd/m<sup>2</sup>  
≤1500

CRI  
≥90

X-PERT

## Generale

Soffitto , Incasso  
nero , RAL9005 <sup>1</sup>  
Set di montaggio nero intenso  
fronte IP44 , retro IP20  
1310 lm

## LED

2700 K  
CRI ≥ 90  
L80 / 50000 h  
MacAdam iniziale ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89  
MR 0.53  
MDER 0.48

## Ottico

medium  
beam angle 33°  
UGR < 13 , ≥65° <1500 cd/m<sup>2</sup>  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Dati elettrici

non DIM  
20.2 W  
inserto 17.2 W  
36 Vf  
500 mA  
classe isolamento 2 220-240V  
65 lm/W  
inserto 76 lm/W

## Dati fisici


bordo  
diameter 118 mm  
altezza 75 mm  
0.47 kg

## Sagoma


diameter 108 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 80 mm

<sup>1</sup> Codice RAL  
<sup>2</sup> Valore del prodotto contenitore a pieno carico (non regolato)

## Distribuzione della luce



## Disegno prodotto

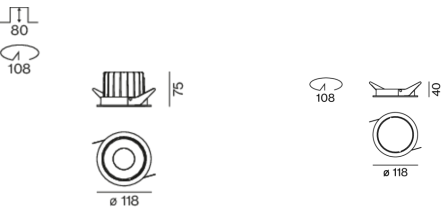

## Istruzioni di montaggio



## Calcolatore di illuminazione

