


180-733053XS



Progetto / Tipo

Appunti

Quantità / Data

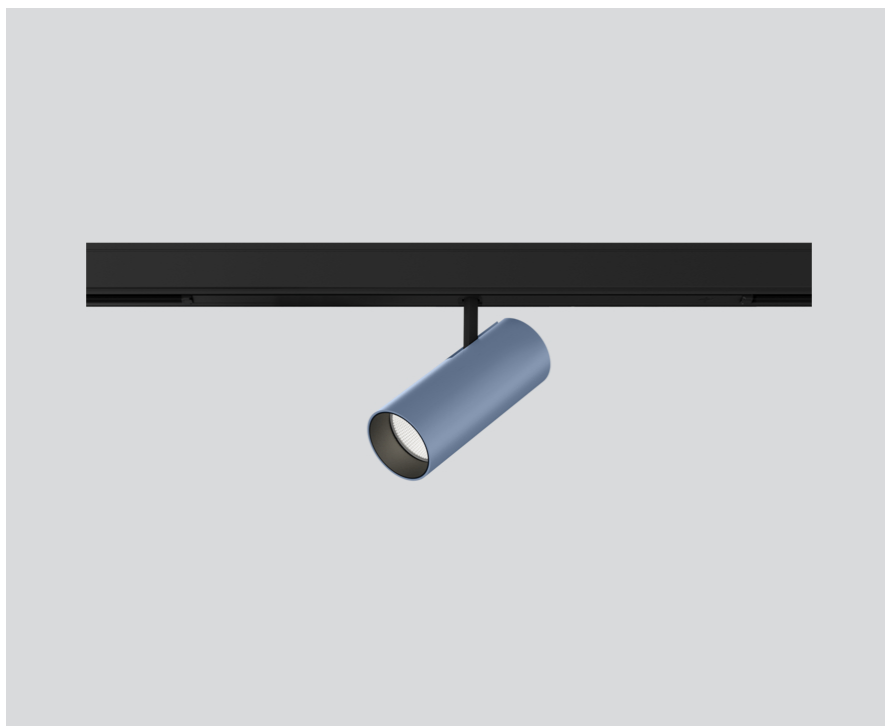

Soffitto , Binario

orientabile max 90°

rotazione 360°

colori speciali

IP20

1880 lm

3000 K

CRI ≥ 90

180 / 50

MacAdam iniziò

MacAdam Iniziale ≤ 2 SDCM

R_g : 100, R_f : 91, $R_{\{1-15\}}$: 88


MR 0.59
MDER 0

MDER 0.53

spot

angolo del fascio 17°
$$P_{\text{stLM}} \leq 1.0^{-1}$$
$$SVM < 0.4^{-1}$$


Distribuzione della luce



spot 17°

h (m)	E0° (lx)	ø (m)
1	14700	0.30
2	3700	0.59
3	1600	0.89
4	900	1.19
5	600	1.48

Disegno prodotto



¹ Valore del prodotto contenitore a pieno carico (non regolato)

² incl. considerazione delle perdite ottiche, delle perdite dell'unità di controllo interna e dell'efficienza del dispositivo operativo

Istruzioni di montaggio



Calcolatore di illuminazione

