

## 030-6610434M



Quantità / Data

inserto ottico 66 lm/W<sup>1</sup>


## MDER 0.49

$$SVM \leq 0.4^2$$


## 1 DALI Addr.

## 1500 mm

<sup>2</sup> Valore del prodotto contenitore a pieno carico (non regolato)

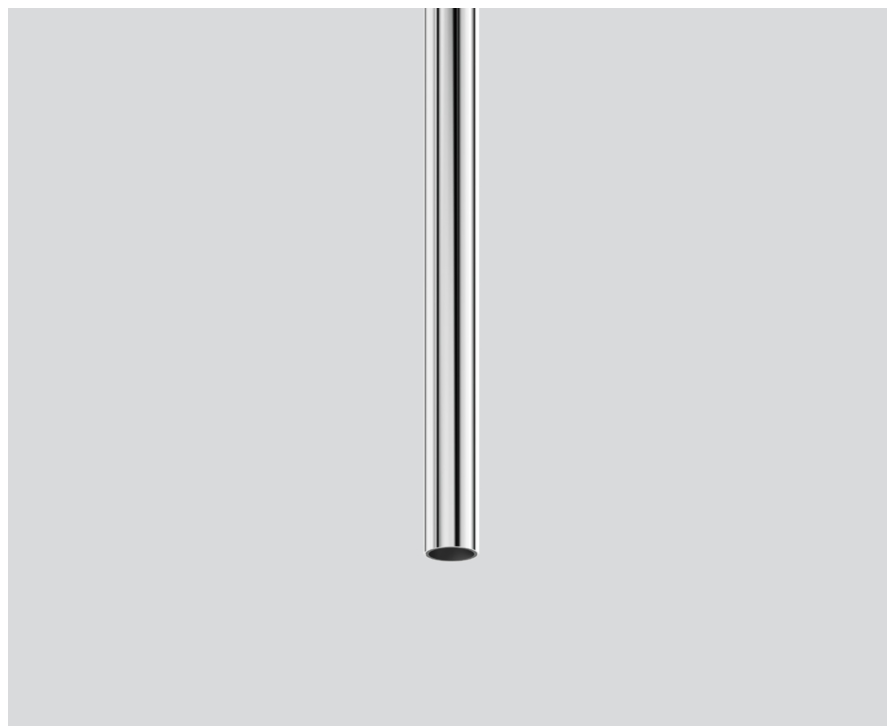

h (m)	E0° (lx)	ø (m)
1	832	0.41
2	208	0.81
3	92	1.22
4	52	1.62
5	33	2.03



# TILA 16 suspended

MOVE IT 10  
030-6610434M



Progetto / Tipo

Appunti

Quantità / Data

## Fattore di manutenzione

Tempo di funzionamento [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.97	0.94	0.91	0.88	0.85
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Fattore di manutenzione del locale
MF	Fattore di manutenzione	LLMF	Fattore di manutenzione del flusso luminoso
LMF <sup>a</sup>	Fattore di manutenzione dell'apparecchio	LSF	Fattore di sopravvivenza della lampada

<sup>a</sup> Secondo "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. I valori devono essere determinati dal pianificatore.

## Accessori di montaggio

### HOOK

COLORE	Ø (MM)	N. ARTICOLO/I
bianco traffico	16	030-1000017
nero intenso	16	030-1000018

