

SASSO 60 square downlight

trim 2 lamps

048-2612914F 048-2699318 002-90742



Progetto / Tipo
Appunti
Quantità / Data



↑ IP20 ↓ IP44	220-240V	X-PERT	UGR ≤ 19	cd/m² ≤ 1500	CRI ≥ 90	X-PERT
------------------	----------	--------	-------------	-----------------	-------------	--------

Generale

Soffitto , Incasso
argento opaco
Set di montaggio nero intenso
fronte IP44 , retro IP20
1830 lm

LED

2700 K
CRI ≥ 90
L80 / 50000 h
MacAdam iniziale ≤ 2 SDCM
R _g : 97 , R _r : 91 , R _{f(1-15)} : 87
MR 0.52
MDER 0.47


Ottico

flood
beam angle 42°
UGR < 19 , ≥ 65° < 1500 cd/m²
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹


Dati elettrici

non DIM
20.5 W
inserto 8.7 W
36 Vf
250 mA
totale inserti 17.4 W
classe isolamento 2 220-240V
89 lm/W
inserto 105 lm/W

Distribuzione della luce



Disegno prodotto

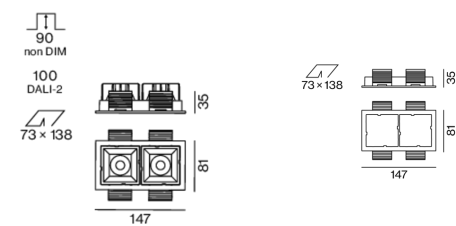

Dati fisici

bordo
length 147 mm
width 81 mm
altezza 48 mm
0.28 kg

Sagoma

length 138 mm
width 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 90 mm

¹ Valore del prodotto contenitore a pieno carico (non regolato)

Istruzioni di montaggio



Calcolatore di illuminazione

