

NEVA panel

acoustic suspended

^{EN} Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; square design; high quality visual and tactile surface with embossed pattern; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with MITA square 200 acoustic suspended (LUMINAIRE or BLIND SUSPENSION); optionally with sensor (ESSENTIAL or SENSE)

^{IT} Elemento acustico in feltro prodotto con PET riciclato di alta qualità, autoportante e con proprietà fonoassorbenti; forma quadrato; superficie di alta qualità sia dal punto di vista ottico che tattile con motivo in rilievo; assorbimento del suono diretto e del suono riflesso dal soffitto; con elevata performance acustica; sospesa con MITA square 200 acoustic suspended (LUMINAIRE o BLIND SUSPENSION); a scelta con sensore (ESSENTIAL o SENSE)

Quickinfo

PET felt

♻️ from recycled material
up to absorption class A
suitable for workstations

🔥 flame retardant version available

3000 K, 4000 K

CRI ≥ 80, 3 SDCM


UGR ≤ 19 / 65° ≤ 1500 cd/m²

up to 159 lm/W

L95 @ 50 000 h

DALI-2, ESSENTIAL, SENSE sensor
reflector (UGR ≤ 19)

Types




Acoustic colours




Luminaire colours



Light distribution



flat height
25 mm



embossed
acoustic panel




DIN EN 12464-1
UGR ≤ 19

Order options

ACOUSTIC COLOUR	
<input type="radio"/> white	W
<input type="radio"/> marble grey	D
<input type="radio"/> anthracite	B
<input type="radio"/> black	L
<input type="radio"/> limestone	S

other colours on request



NEVA panel

PET felt

A	B	C	D	E
$\alpha_w 1.00$				

1.05	1.02
NRC	SAA


TYPE	L-W-H (mm)	ORDER CODE
800 panel	800-800-25	091-322110
1200 panel	1200-1200-25	091-322210

Acoustic data

Equivalent sound absorption area (A_{eq})

TYPE	125	250	500	1000	2000	4000 Hz
800 panel	0.19	0.48	0.64	0.64	0.64	0.64
1200 panel	0.43	1.08	1.44	1.44	1.44	1.44

Sound absorption coefficient (α_p)

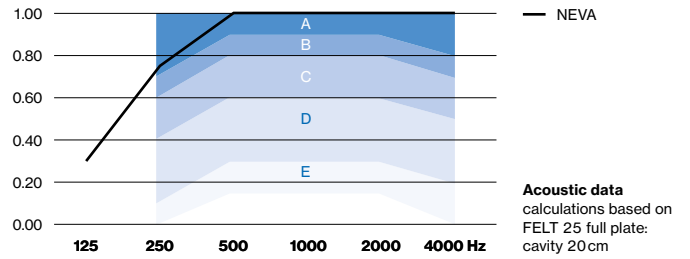

Order options

COLOUR TEMPERATURE	
3000K	5
4000K	6

CONTROL	
DALI-2	3
DALI-2 ESSENTIAL sensor (brightness & presence)*	B
DALI-2 SENSE sensor (brightness, presence, temperature, sound pressure, humidity, CO ₂)*	P

*DALI-2 application controller needed

MATERIAL COLOUR	
<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8

REFLECTOR COLOUR	
<input checked="" type="radio"/> chrome	R
<input type="radio"/> dark chrome	B

LUMINOUS FLUX value calculated for colour white, reflector chrome

MITA square 200 acoustic suspended

UGR ≤ 19


$\text{cd/m}^2 \leq 1500$

DALI 1ADDR

220-240V

X-PERT

X-PERT



SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.8W	3000K	1950lm	091-3170
16.3W	4000K	2160lm	091-3171
	3000K	2270lm	
	4000K	2590lm	

BLIND SUSPENSION

TYPE	ORDER CODE
200 square	091-319010