


TASK ACOUSTIC 1200

round

suspended
059-579236X



Project / Type	
Notes	
Count / Date	

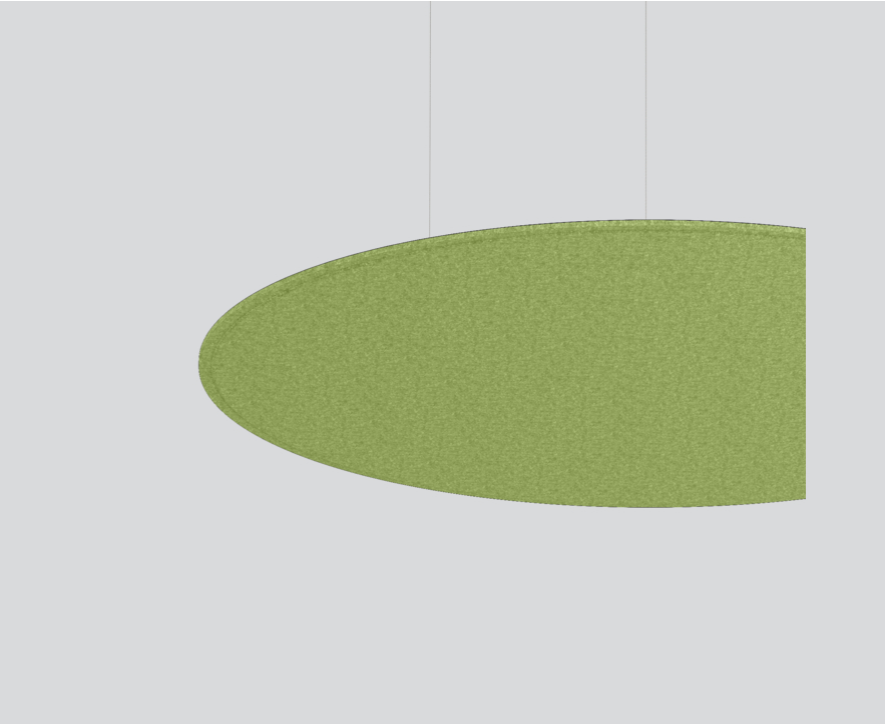

General	
Ceiling , Suspended	
acoustic special colours	

Physical	
panel only	
diameter 1155 mm	
height 30 mm	
4.2 kg	

Acoustics	
Alpha w (α_w) up to 0.95 ¹	
SAC (sound absorption class) up to A ¹	
NRC up to 0.95 ¹	
SAA up to 0.91 ¹	


¹ Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 50% recycled PET; round design; high quality visual and tactile surface, acoustic special colours; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

Product drawing



TASK

ACOUSTIC 1200

round

suspended

059-579236X



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.6	0.77	1.23	1.53	1.8	1.87

Sound absorption coefficient (α_p)

