

# SASSO 100 round wallwasher

trimless exposed concrete

048-2740411A 048-2795210 002-90774



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



220-240V

360°

X-PERT

CRI ≥ 90

X-PERT

## General

Ceiling , Recessed

rotation 360°

black , RAL9005 <sup>1</sup>

Mounting set white aluminium

IP20

1880 lm

## LED

2700 K

CRI ≥ 90

L70 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 90

MR 0.53

MDER 0.48

## Optical

wallwasher

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM

29.4 W

inset 25.0 W

36 Vf

350 mA

PC2 220-240V

64 lm/W

inset 75 lm/W

## Physical

trimless for exposed concrete ceiling

length 230 mm

width 230 mm

height 162 mm


2.78 kg

## Cutout


recessed depth 120 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

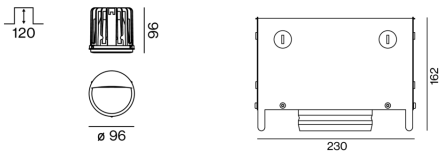

## Installation instructions



## Lighting calculator

