

# UNICO Q9 basic

trimless

090-7Q963B0021 090-7Q90100



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

chrome reflector

IP20

2900 lm

## LED

4000 K

CRI  $\geq 90$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 102 , R<sub>f</sub>: 93 , R<sub>f(1-15)</sub>: 92

MR 0.81

MDER 0.74

## Optical

medium round

beam angle 33°

UGR < 10 ,  $\geq 65^\circ$  <3000 cd/m<sup>2</sup>

PstLM  $\leq 1.0$ <sup>1</sup>

SVM  $\leq 0.4$ <sup>1</sup>

## Electrical

DALI-2

220-240 V

system 29.9 W

system 97 lm/W<sup>2</sup>

PC2

## Physical

trimless

length 122 mm

width 122 mm

height 51 mm

0.83 kg

## Cutout

length 130 mm

width 130 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 90 mm


<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses  
SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Light distribution



## Product drawing

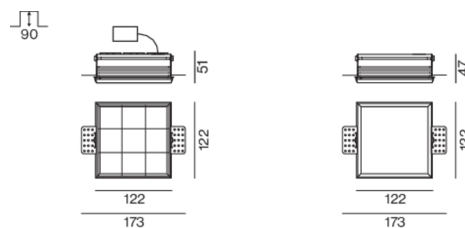

## Installation instructions



## Lighting calculator



# UNICO Q9 basic

trimless

090-7Q963B0021 090-7Q90100



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.95	0.95	0.94	0.93
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup> Room Surface Maintenance Factor		
MF	Maintenance Factor		LLMF Lamp Lumens Maintenance Factor		
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF Lamp Survival Faktor		

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	37
B16	60
C10	37
C16	60

## Components

### MOUNTING SET trimless

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
for installation in plasterboard ceilings 12.5/15/20/25 mm	122-122-47	090-7Q90100



### Mounting accessories

### MOUNTING SET trimless

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
for installation in plasterboard ceilings 12.5/15/20/25 mm	122-122-47	090-7Q90100



### Mounting accessories

### THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
non DIM cable ø 4 – 12 mm, Linect®-Ready	105-58-30	005-253110
DALI cable ø 4 – 12 mm, Linect®-Ready	105-58-30	005-255110

