

DOC 180

wall


088-2710518



Project / Type


Notes

Count / Date

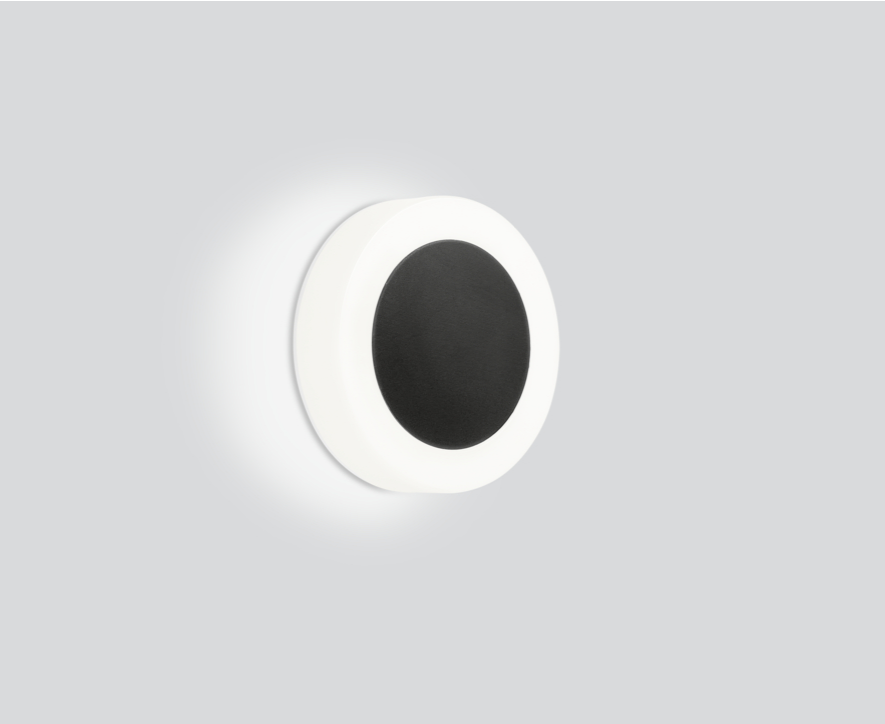


Round light fitting in die-cast aluminium; central decorative disc made of galvanized sheet steel attached by magnet; surface black powder coated; suitable for wall or ceiling mounting; opal cover for completely homogeneous illumination; with increased transmission and diffusion; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP54; with pressure equalisation valve; PC1; 220-240 V; shock resistance IK09; ambient temperatures from -20°C to + 50°C; suitable for through wiring; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling / Wall , Surface

black , RAL 9005 ¹

IP54

IK09

1340 lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

opal (lambertsch)

Electrical

non DIM

220-240 V

system 13.5 W

system 99 lm/W²

PC1

Physical

diameter 180 mm

height 40 mm

0.9 kg

¹ RAL code
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

