

# MOVE IN 32 flex round

trimless

063-8211517F 063-8811117 002-90742



Project / Type

Notes

Count / Date



## General

Ceiling , Semi-Recessed

tilt max 90°

rotation 360°

white , RAL 9016 <sup>1</sup>

IP20

795 lm

fixture 91 lm/W<sup>2</sup>

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>{1-15}</sub>: 88

MR 0.59

MDER 0.53

## Optical

flood

beam angle 34°

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

## Electrical

non DIM

220-240 V

system 11.7 W

fixture 8.7 W

36 Vf

250 mA

PC2

## Physical

trimless

diameter 63 mm

height 92 mm

0.35 kg

## Cutout

diameter 54 mm


min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 110 mm

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)


## Light distribution



flood 34°

h (m)	E0° (lx)	ø (m)
1	2590	0.61
2	650	1.21
3	290	1.82
4	160	2.42
5	100	3.03

## Product drawing

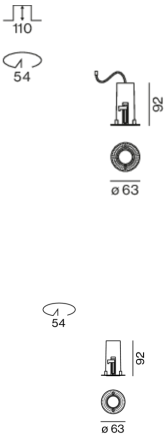

## Installation instructions



## Lighting calculator

