

# TASK ACOUSTIC 1200 half round


suspended  
059-579246D



Project / Type

Notes

Count / Date

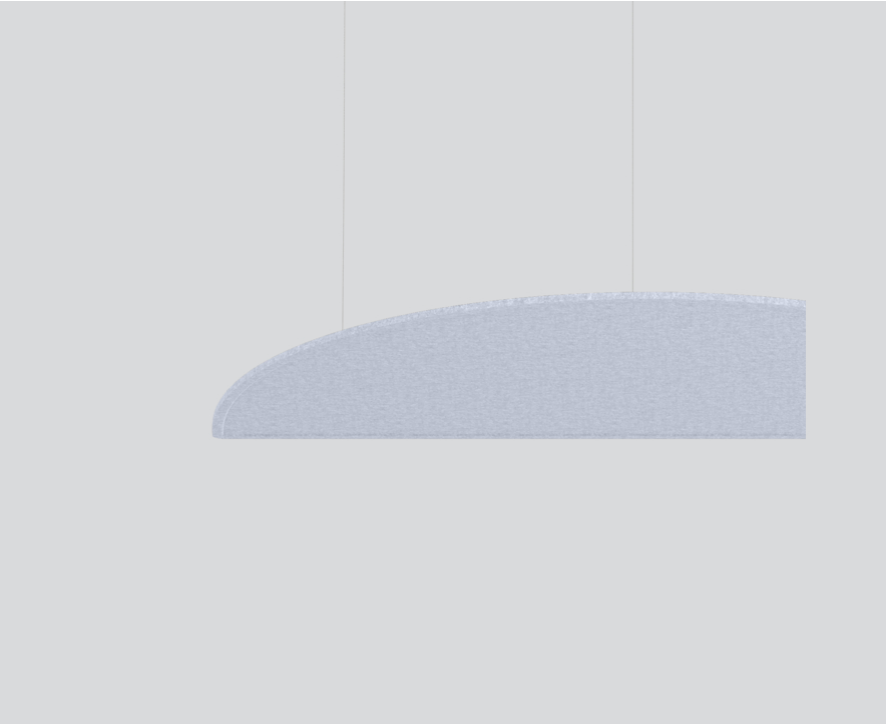

General

Ceiling , Suspended

marble grey

Physical

panel only

length 1155 mm

width 573 mm

height 30 mm

4.2 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95<sup>1</sup>

SAC (sound absorption class) up to A<sup>1</sup>

NRC up to 0.95<sup>1</sup>

SAA up to 0.91<sup>1</sup>


<sup>1</sup> Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

## Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 50% recycled PET; half round design; high quality visual and tactile surface, marble grey; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

## Product drawing



TASK

ACOUSTIC 1200 half round

suspended

059-579246D



Project / Type

Notes

Count / Date

Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.3	0.33	0.6	0.77	0.87	0.87

Sound absorption coefficient ( $\alpha_p$ )

