

TASK ACOUSTIC 900

square

surface


059-579115D



Project / Type

Notes

Count / Date

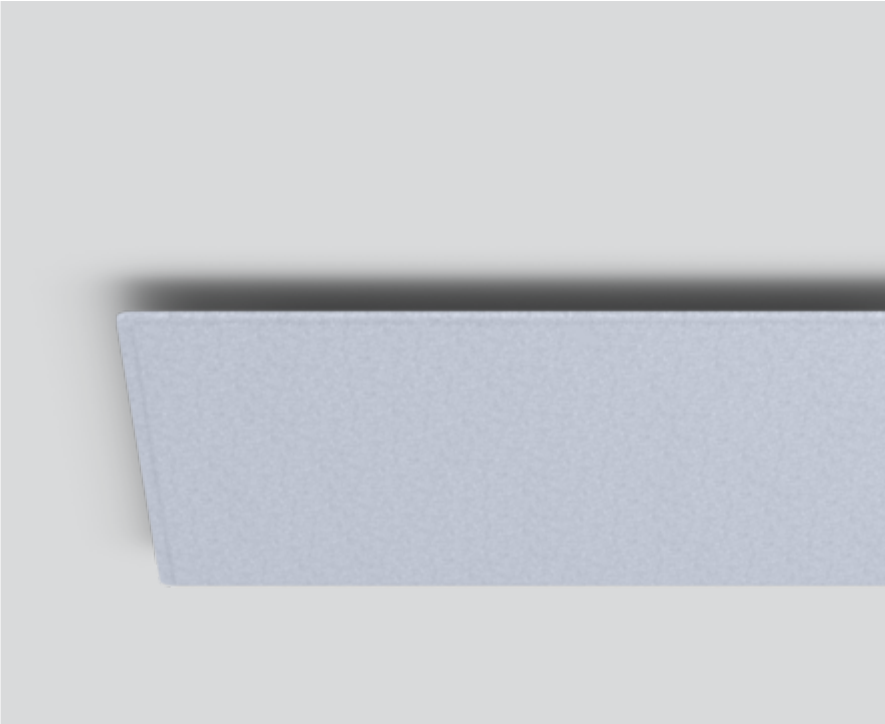

General

Ceiling , Surface

marble grey

Physical

panel only

length 900 mm

width 900 mm

height 30 mm

Acoustics

Alpha w (α_w) up to 0.6 ¹

SAC (sound absorption class) up to C ¹

NRC up to 0.75 ¹

SAA up to 0.76 ¹


¹ Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 3cm

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; square design; high quality visual and tactile surface, marble grey; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; for wall-/ceiling surface mounting;

Product drawing



TASK ACOUSTIC 900

square

surface

059-579115D



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

| 125 HZ | 250 HZ | 500 HZ | 1000 HZ | 2000 HZ | 4000 HZ |
|--------|--------|--------|---------|---------|---------|
| 0.04 | 0.24 | 0.57 | 0.81 | 0.81 | 0.81 |

Sound absorption coefficient (α_p)

