

LINEA opal / 1 spot

wall

058-6178528BH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97 ; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K left, incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

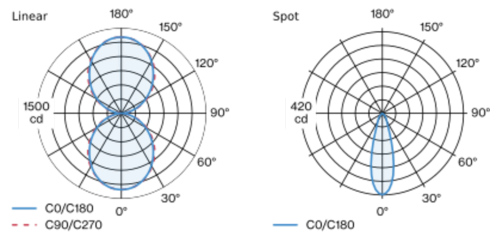

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



General

Wall , Surface

black , RAL 9005 ¹

IP20

indirect 3490 lm

direct 3490 lm

total 6980 lm

2900 lm/m

tilt max 89°

172 lm

LED

3000 K

CRI $\geq 97^{2-90^3}$

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³ , R_f: 86²-91³ , R_{f(1-15)}: 94²-89³

MR 0.53²-0.61³

MDER 0.48²-0.55³

Optical

High Performance Opal

flood²-opal (lambertsch)³

PstLM $\leq 1.0^{3\ 2\ 4}$

SVM $\leq 0.4^{3\ 2\ 4}$

beam angle 30°

Electrical

non DIM / switch (only spotlights)

220-240 V

system 2.7²-70³ W

system 64²-100³ lm/W⁵

PC1

29 W/m

Physical

length 2510 mm

width 40 mm

height 100 mm

left

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



LINEA opal / 1 spot

wall

058-6178528BH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.99	0.99	0.99	0.99	0.99
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF^a

Luminaire Maintenance Factor

RSMF^a

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	31
B13	40
B16	50
B20	62
B25	78
C10	52
C13	67
C16	85
C20	104
C25	130

