

LINEA opal / 2 spots

wall

058-6174D48DH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,2 W / 141 lm / 3000 K (1x left, 1x right), incl. switch; incl. DALI-2 / DT8 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution

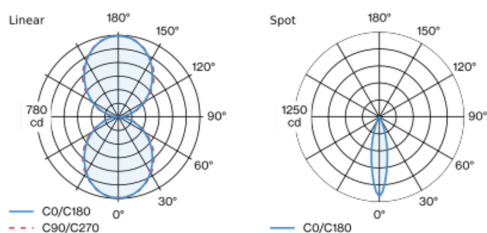

flood 23° Spot

h (m)	E0° (lx)	ø (m)
1	584	0.41
2	146	0.83
3	65	1.24
4	37	1.65
5	23	2.07

Product drawing



General

Wall , Surface

black , RAL 9005 ¹

IP20

indirect 2020 lm

direct 2020 lm

total 4040 lm

3350 lm/m

tilt max 89°

282 lm

LED

3000 K²-tunable white³

2700 K - 5000 K

CRI ≥ 90

L80 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 100²-99³, R_f: 91²-90³, R_{f(1-15)}: 88

MR 0.59²-0.53³

MDER 0.53²-0.48³

Optical

High Performance Opal

flood²-opal (lambertsch)³

PstLM ≤ 1.0 ^{3 2 4}

SVM ≤ 0.4 ^{3 2 4}

beam angle 23°

Electrical

DALI-2 / switch (only spotlights)²-DALI-2 DT8 / switch (only spotlights)³

220-240 V

system 4.5²-42³ W

system 63²-96³ lm/W⁵

PC1

1 DALI Addr.

35 W/m

Physical

length 1410 mm

width 40 mm

height 100 mm

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)

⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



[058-6174D48DH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

05.04.2025