

LINEA opal / 2 spots

wall

058-6174648DH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,2 W / 141 lm / 3000 K (1x left, 1x right), incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution

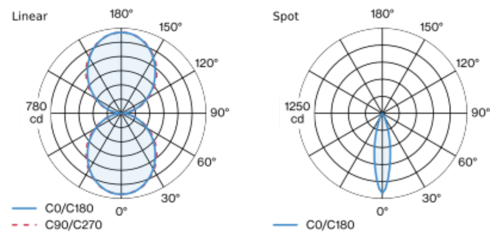

flood 23° Spot

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 584 | 0.41 |
| 2 | 146 | 0.83 |
| 3 | 65 | 1.24 |
| 4 | 37 | 1.65 |
| 5 | 23 | 2.07 |

Product drawing



General

Wall , Surface

black , RAL 9005 ¹

IP20

indirect 1900 lm

direct 1940 lm

total 3840 lm

3190 lm/m

tilt max 89°

282 lm

LED

3000 K²-4000 K³

CRI ≥ 90

L80 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 100²-98³ , R_f: 91²-90³ , R_{f(1-15)}: 88

MR 0.59²-0.76³

MDER 0.53²-0.69³

Optical

High Performance Opal

flood²-opal (lambertsch)³

PstLM ≤ 1.0 ^{3 2 4}

SVM ≤ 0.4 ^{3 2 4}

beam angle 23°

Electrical

DALI-2 / switch (only spotlights)

220-240 V

system 4.5²-35³ W

system 63²-110³ lm/W⁵

PC1

1 DALI Addr.

29 W/m

Physical

length 1410 mm

width 40 mm

height 100 mm

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

