

# MOVE IT 25 S track

## indirect


050-7419518



Project / Type

Notes

Count / Date

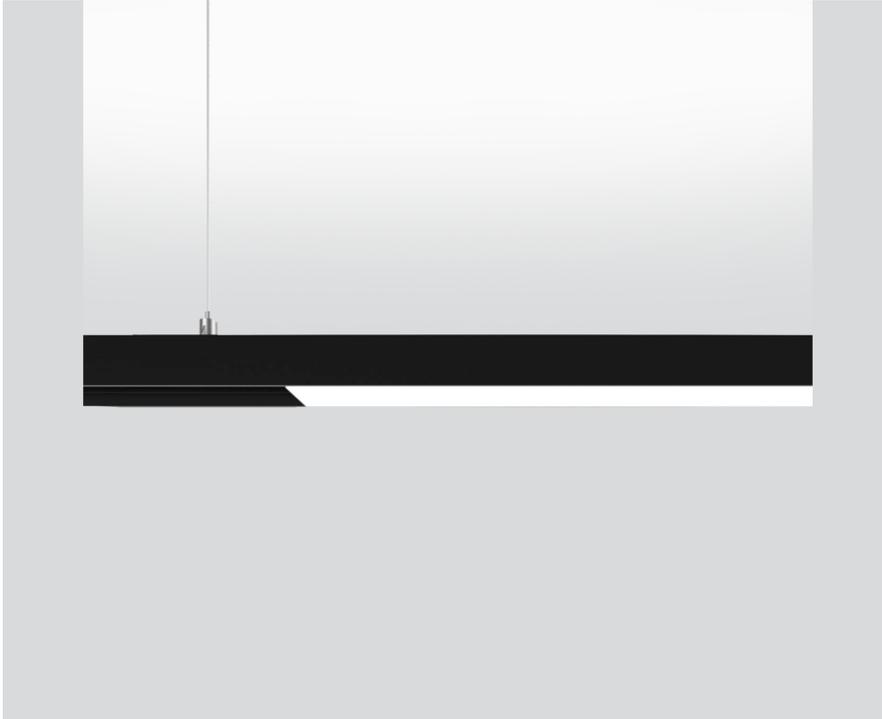

### General

Ceiling , Suspended

black , RAL9005 <sup>1</sup>

1670 lm/m

IP20

6000 lm

### LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.61

MDER 0.55

### Optical

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

48 V

inset 51 W

PC3

inset 118 lm/W<sup>3</sup>

14 W/m

### Physical

length 3625 mm

width 31 mm

height 31 mm


3.2 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)


<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

Thin extruded aluminium profile with 31mm height and 28mm width groove; for suspended mounting (1500 mm cable suspension as an accessory); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; indirect light component covered with opal lens cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power rail profile for supply voltage feed; surface anodised black; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3; accessories are listed separately; light source not replaceable;

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator

