

# MOVE IT 25 track indirect


050-740453X



Project / Type

Notes

Count / Date

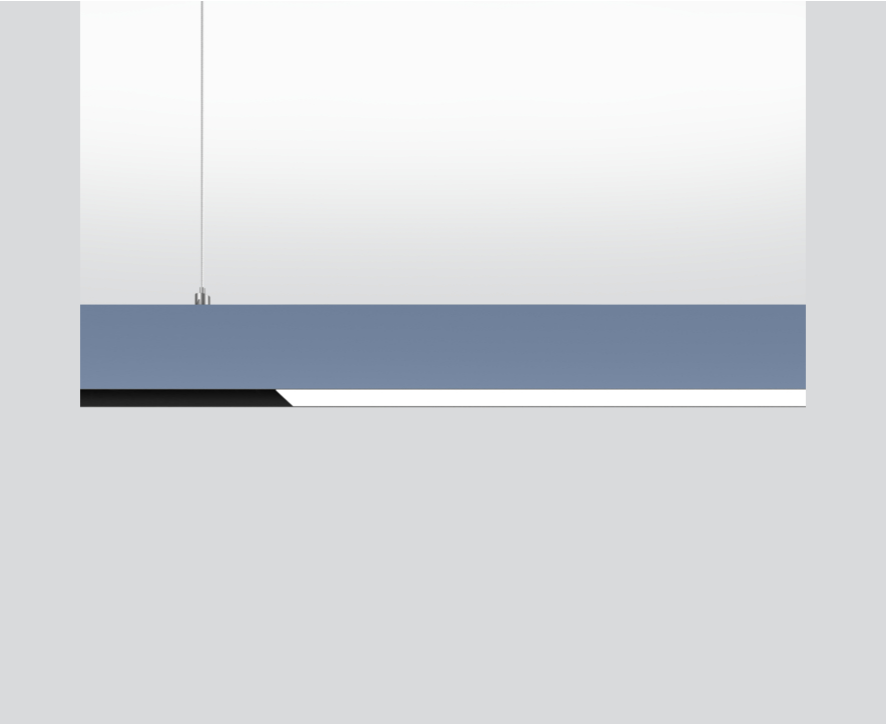

Extruded aluminium profile with 28mm width groove; for suspended mounting (1500 mm cable suspension as an accessory); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; indirect light component covered with opal lens cover; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power track profile for take off of supply voltage and DALI signal; surface special colours; powder coated / anodised; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3 48V; sound absorbing accessories for installation in the MOVE IT suspended system available; accessories are listed separately; light source not replaceable;

## Light distribution



## Product drawing



### General

Ceiling , Suspended

special colours , RAL9005 <sup>1</sup>

Inner colour black

1670 lm/m

IP20

1810 lm

### LED

3000 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.61

MDER 0.55

### Optical

PstLM  $\leq 1.0$  <sup>2</sup>

SVM  $\leq 0.4$  <sup>2</sup>

### Electrical

DALI-2 single control

system 15.3 W

PC3 48V

system 118 lm/W<sup>3</sup>

14 W/m

### Physical

length 1220 mm

width 31 mm

height 60 mm

1.4 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



## Lighting calculator

