




Project / Type

Notes

Count / Date

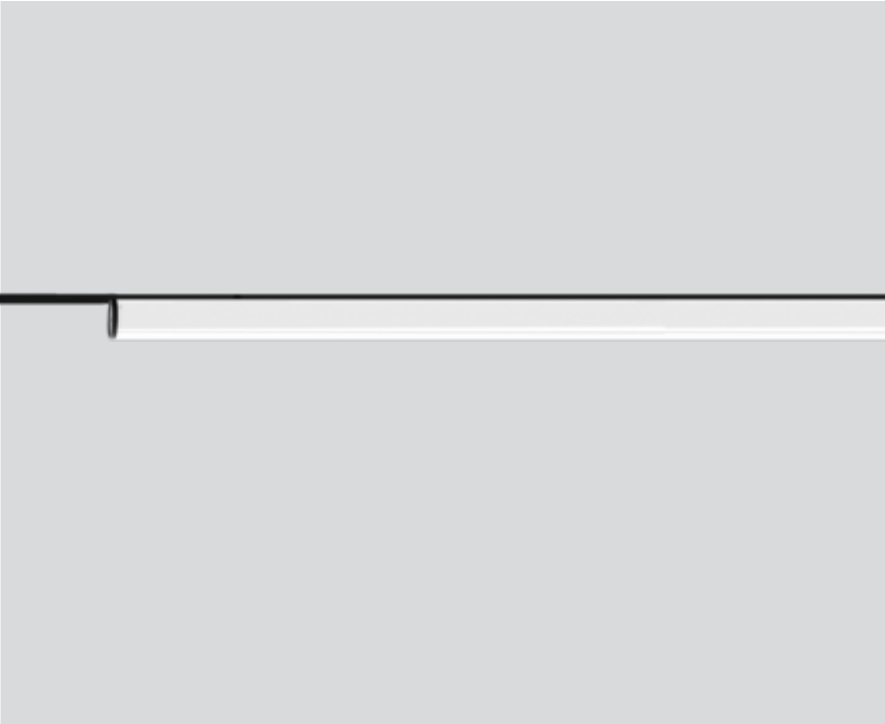

General

Ceiling / Wall , Track

rotation 360°

black , RAL 9005 ¹

IP20

3160 lm

2100 lm/m

optical inset 171 lm/W²

LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

opal (lambertsch)

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

non DIM

48 V

fixture 26.4 W

optical inset 18.5 W

PC3

18 W/m

Physical

length 1510 mm

width 33 mm

height 33 mm


0.55 kg

¹ RAL code


² OPTICAL INSET: incl. consideration of optical losses

³ Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions





Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.