




Project / Type _____

Notes _____

Count / Date _____

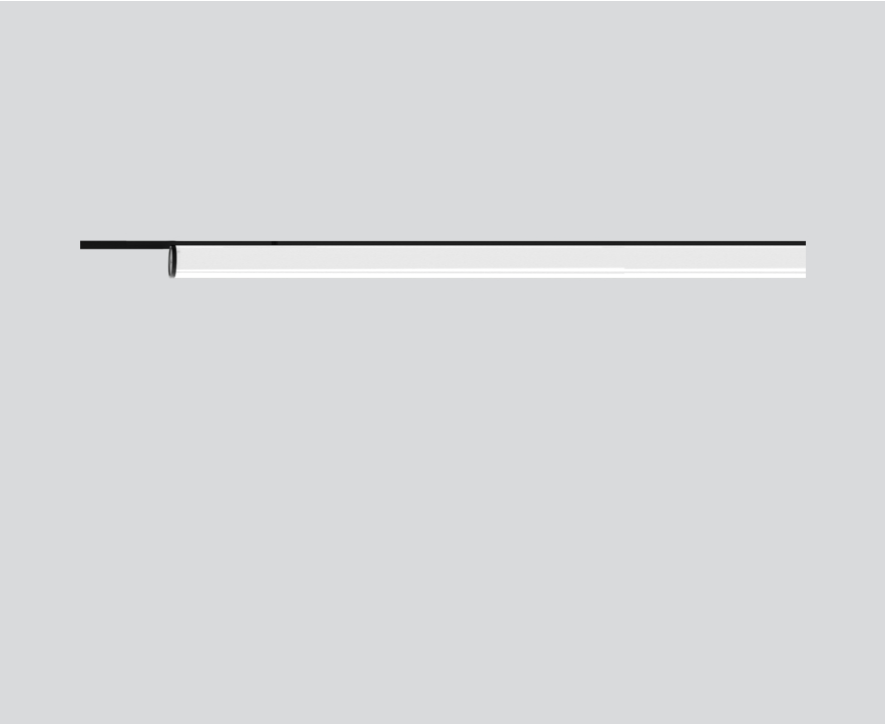

General
Ceiling / Wall , Track
rotation 360°
black , RAL9005 ¹
2100 lm/m
IP20
3790 lm

LED
3000 K
CRI ≥ 80
L80 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
MR 0.54
MDER 0.49


Optical
opal (lambertsch)
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical
non DIM
system 32 W
PC3 48V
system 118 lm/W ³
18 W/m


Physical
length 1810 mm
width 33 mm
height 33 mm
0.6 kg

Cylindrical, decorative-graphic light inset made of aluminium and satinised PMMA for homogeneous illumination; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; suitable for two MOVE IT 25 / 45 profiles as well as one MOVE IT 25 / 45 profile (axial arrangement); holders 360° rotatable; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with CSP (Chip-Scale-Packaging) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3 48V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; non-dimmable; light source replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions

