

# ARY cable suspended

canopy trim

049-5211517M 005-3521017 002-90733



Project / Type

Notes

Count / Date



### General

Ceiling , Suspended

white , RAL 9016 <sup>1</sup>

Canopy traffic white

IP20

739 lm

fixture 88 lm/W<sup>2</sup>

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 90 , R<sub>{1-15}</sub>: 87

MR 0.59

MDER 0.54

### Optical

medium

beam angle 25°

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

### Electrical

DALI-2

220-240 V

system 11.2 W

fixture 8.4 W

18 Vf

500 mA

PC2

1 DALI Addr.

### Physical

suspension 2000 mm with hook

diameter 47 mm

height 110 mm

0.6 kg

### Cutout

diameter 65 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 130 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)


### Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	3200	0.44
2	800	0.89
3	360	1.33
4	200	1.78
5	130	2.22

### Product drawing

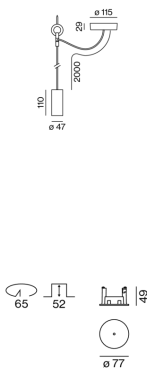

### Installation instructions



### Lighting calculator

