

SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740611W 048-279831G 002-90774



Project / Type	
Notes	
Count / Date	



--	--	--	--

General

Ceiling , Recessed
rotation 360°
black , RAL9005 ¹
Mounting set white aluminium
IP20
5420 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 97 , R _f : 90 , R ₍₁₋₅₎ : 89
MR 0.81
MDER 0.74

Optical

wallwasher floor
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
system 55 W
inset 23.4 W
36 Vf
700 mA
total insets 47 W
PC2 220-240V
system 99 lm/W ³
inset 116 lm/W ⁴

Physical


trim
length 218 mm
width 118 mm
height 96 mm
0.76 kg

Cutout


diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

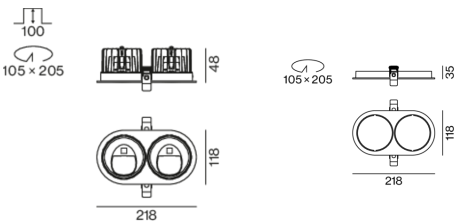

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses



SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740611W 048-279831G 002-90774



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

