

# SASSO 100 round wallwasher/floor

trim

048-2740514W 048-279631G 002-90776



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed  
rotation 360°  
matt silver  
Mounting set white aluminium  
IP20  
2690 lm

## LED

3000 K  
CRI  $\geq$  90  
L80 / 50000 h  
initial MacAdam  $\leq$  2 SDCM  
R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-5)</sub>: 88  
MR 0.59  
MDER 0.53

## Optical

wallwasher floor  
PstLM  $\leq$  1.0 <sup>1</sup>  
SVM  $\leq$  0.4 <sup>1</sup>

## Electrical

DALI-2  
system 27.5 W  
inset 23.4 W  
36 Vf  
700 mA  
PC2 220-240V  
system 98 lm/W<sup>2</sup>  
inset 115 lm/W<sup>3</sup>


## Physical

trim  
diameter 118 mm  
height 96 mm  
0.69 kg


## Cutout

diameter 108 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 100 mm

## Light distribution



## Product drawing

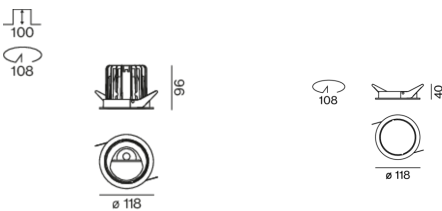

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>3</sup> incl. optical losses

## Installation instructions



## Lighting calculator



# SASSO 100 round wallwasher/floor

trim

048-2740514W 048-279631G 002-90776



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.96                         | 0.92   | 0.88              | 0.85                            | 0.81   |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Faktor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 18                 |
| B16                            | 30                 |
| C10                            | 23                 |
| C16                            | 36                 |

## Components

### MOUNTING SET with trim 1 lamp

| TYPE                      | COLOUR          | Ø (MM) | ARTICLE NUMBER(S) |
|---------------------------|-----------------|--------|-------------------|
| for intermediate ceilings | white aluminium | 118    | 048-279631G       |



### CONVERTER

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|------|------------|-------------------|
| 38 W | 147-44-30  | 002-90776         |



## Mounting accessories

### THROUGH WIRING CONNECTION BOX

| TYPE                      | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|------------|-------------------|
| non DIM cable ø 4 – 12 mm | 105-58-30  | 005-253110        |
| DALI cable ø 4 – 12 mm    | 105-58-30  | 005-255110        |



## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

| COLOUR          | L-W-H (MM)  | ARTICLE NUMBER(S) |
|-----------------|-------------|-------------------|
| white aluminium | 614-307-120 | 048-2695110       |



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

| TYPE  | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63   | 005-6520210       |



### DIN RAIL LED DRIVER

| TYPE                           | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2   200-1050 mA   2 x 42W | 36-88-59   | 005-6121030       |

